Cable output length 2m:

Power :

One shielded class 6 cable coded (4x1.5mm²)1,2,3 green/yellow overall ϕ10.2

Thermal sensors :

One shielded class 6 cable (2x2x0.25mm²) overall ϕ7

Brown-White : PTC

Green-Yellow : KTY84

Minimum bending radius (except for the first 50mm) :

122mm for power cable

72mm for sensors cable

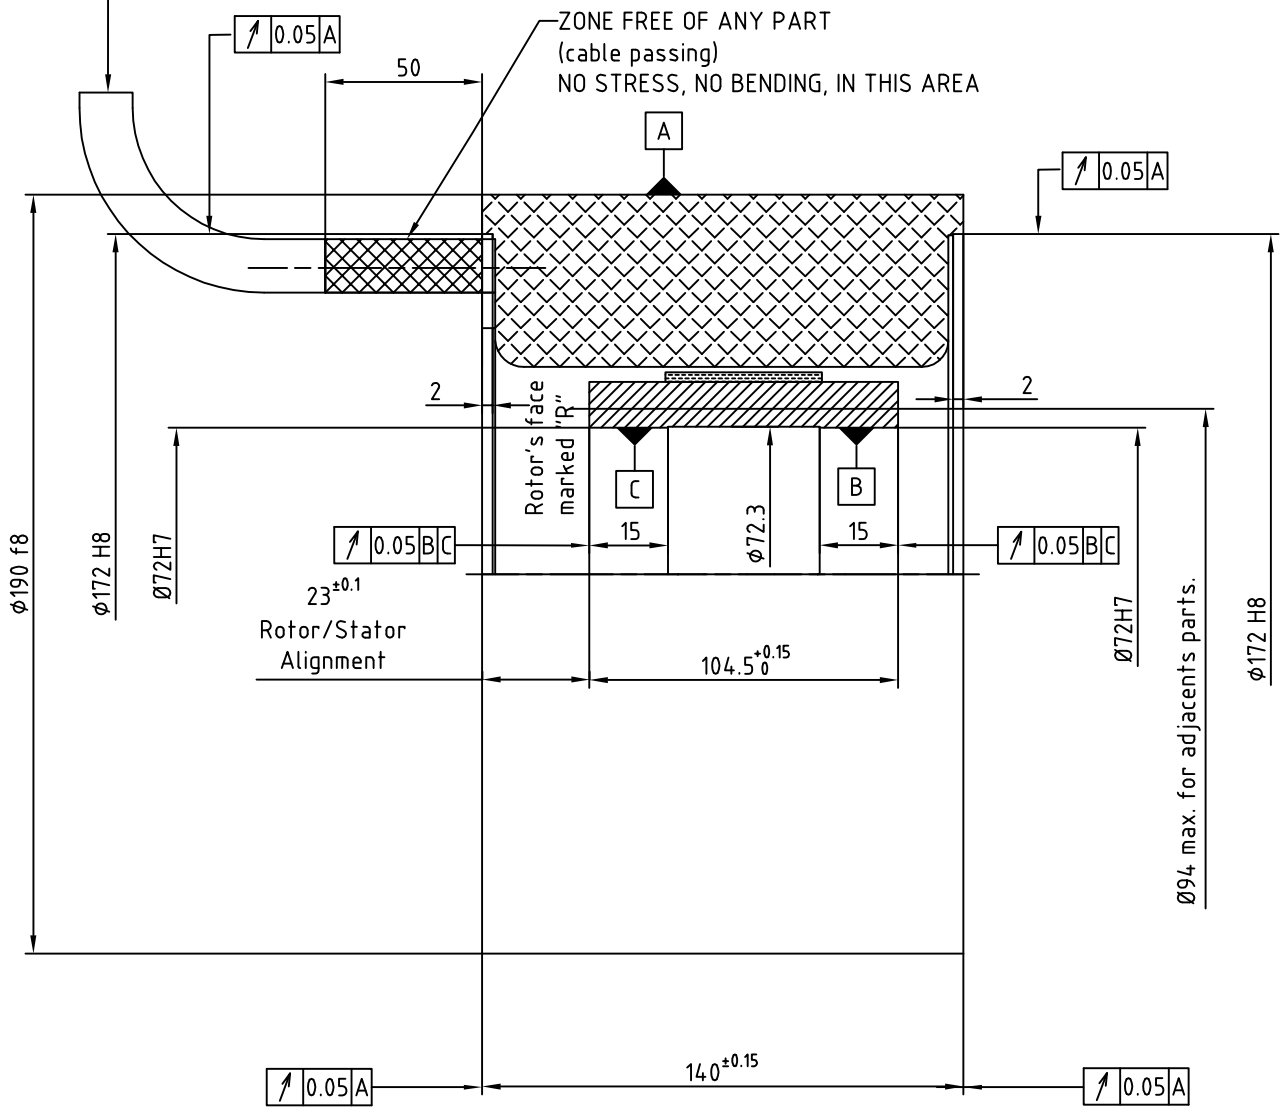

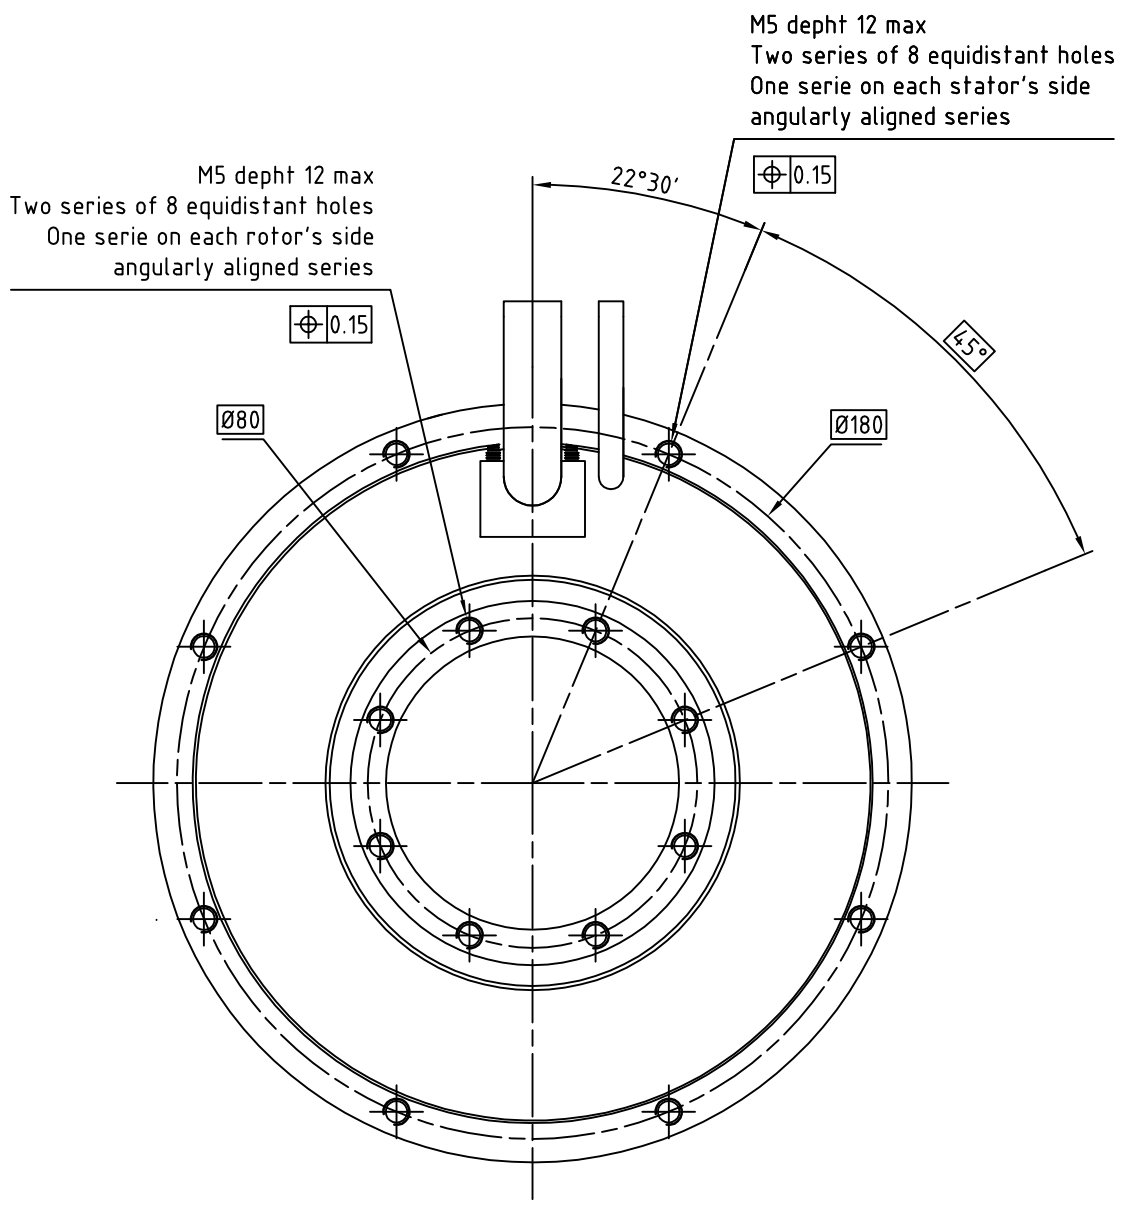

NOTA:
Rotor is not fitted in the stator
For more information about mounting see document 190STK0-WA002

ALXION

AUTOMATIQUE & PRODUCTIQUE
Parc Technologique des Fossés Jean
92712 COLOMBES Cedex
Tél: 0141306304 - Fax: 0141306136

190STK2M1XXXXXX