
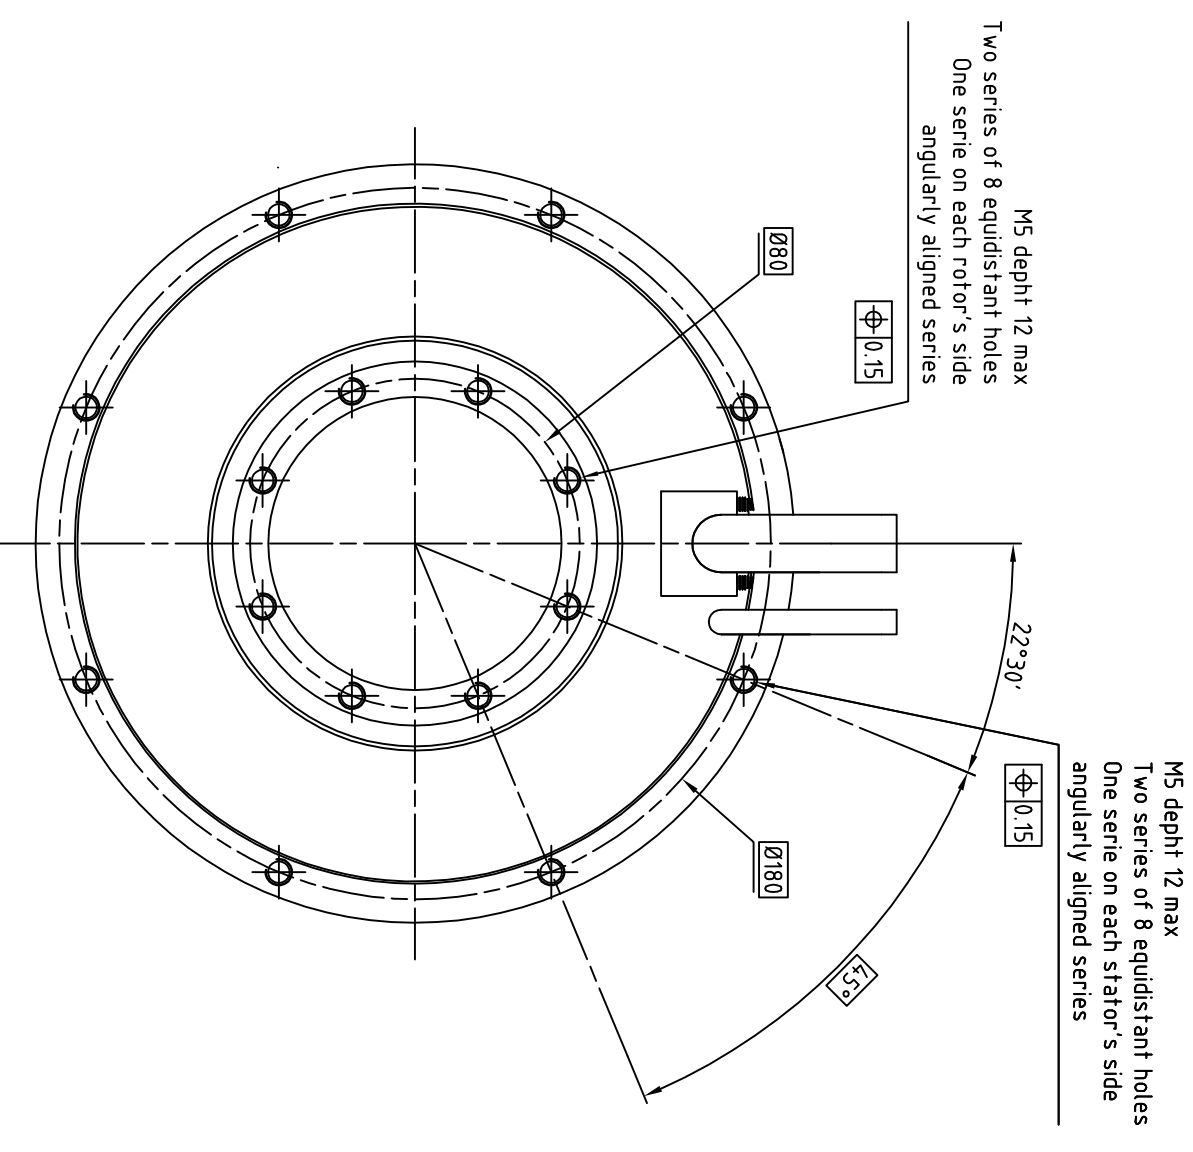


Cable output length 2m:

Power :
 One shielded class 6 cable coded (4x1.5mm²), 1,2,3 green/yellow overall ϕ 10.2

Thermal sensors :
 One shielded class 6 cable (2x2x0.25mm²) overall ϕ 7
 Brown-White : PTC
 Green-Yellow : KTY84
 Minimum bending radius (except for the first 50mm) :
 122mm for power cable
 72mm for sensors cable

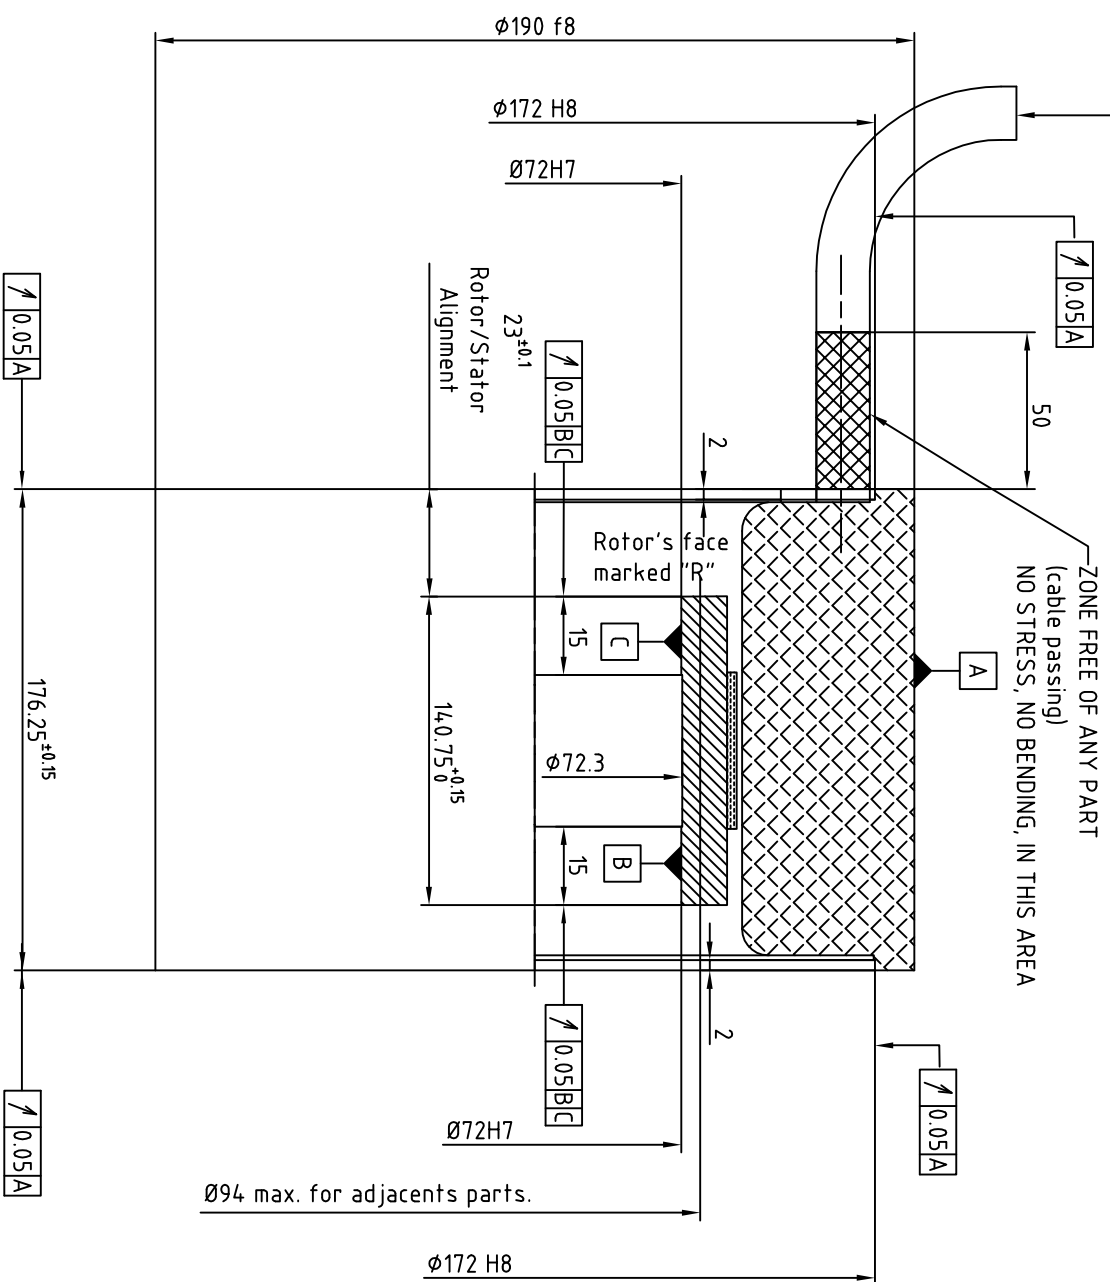

NOTA:
 Rotor is not fitted in the stator
 For more information about mounting see
 document 190STK0-WA002

ALXION

AUTOMATIQUE & PRODUCTIQUE
 Parc Technologique des Fossés Jean
 92712 COLOMBEES Cedex
 Tél: 0141306304 - Fax: 0141306136

190STK3M1XXXXXX