
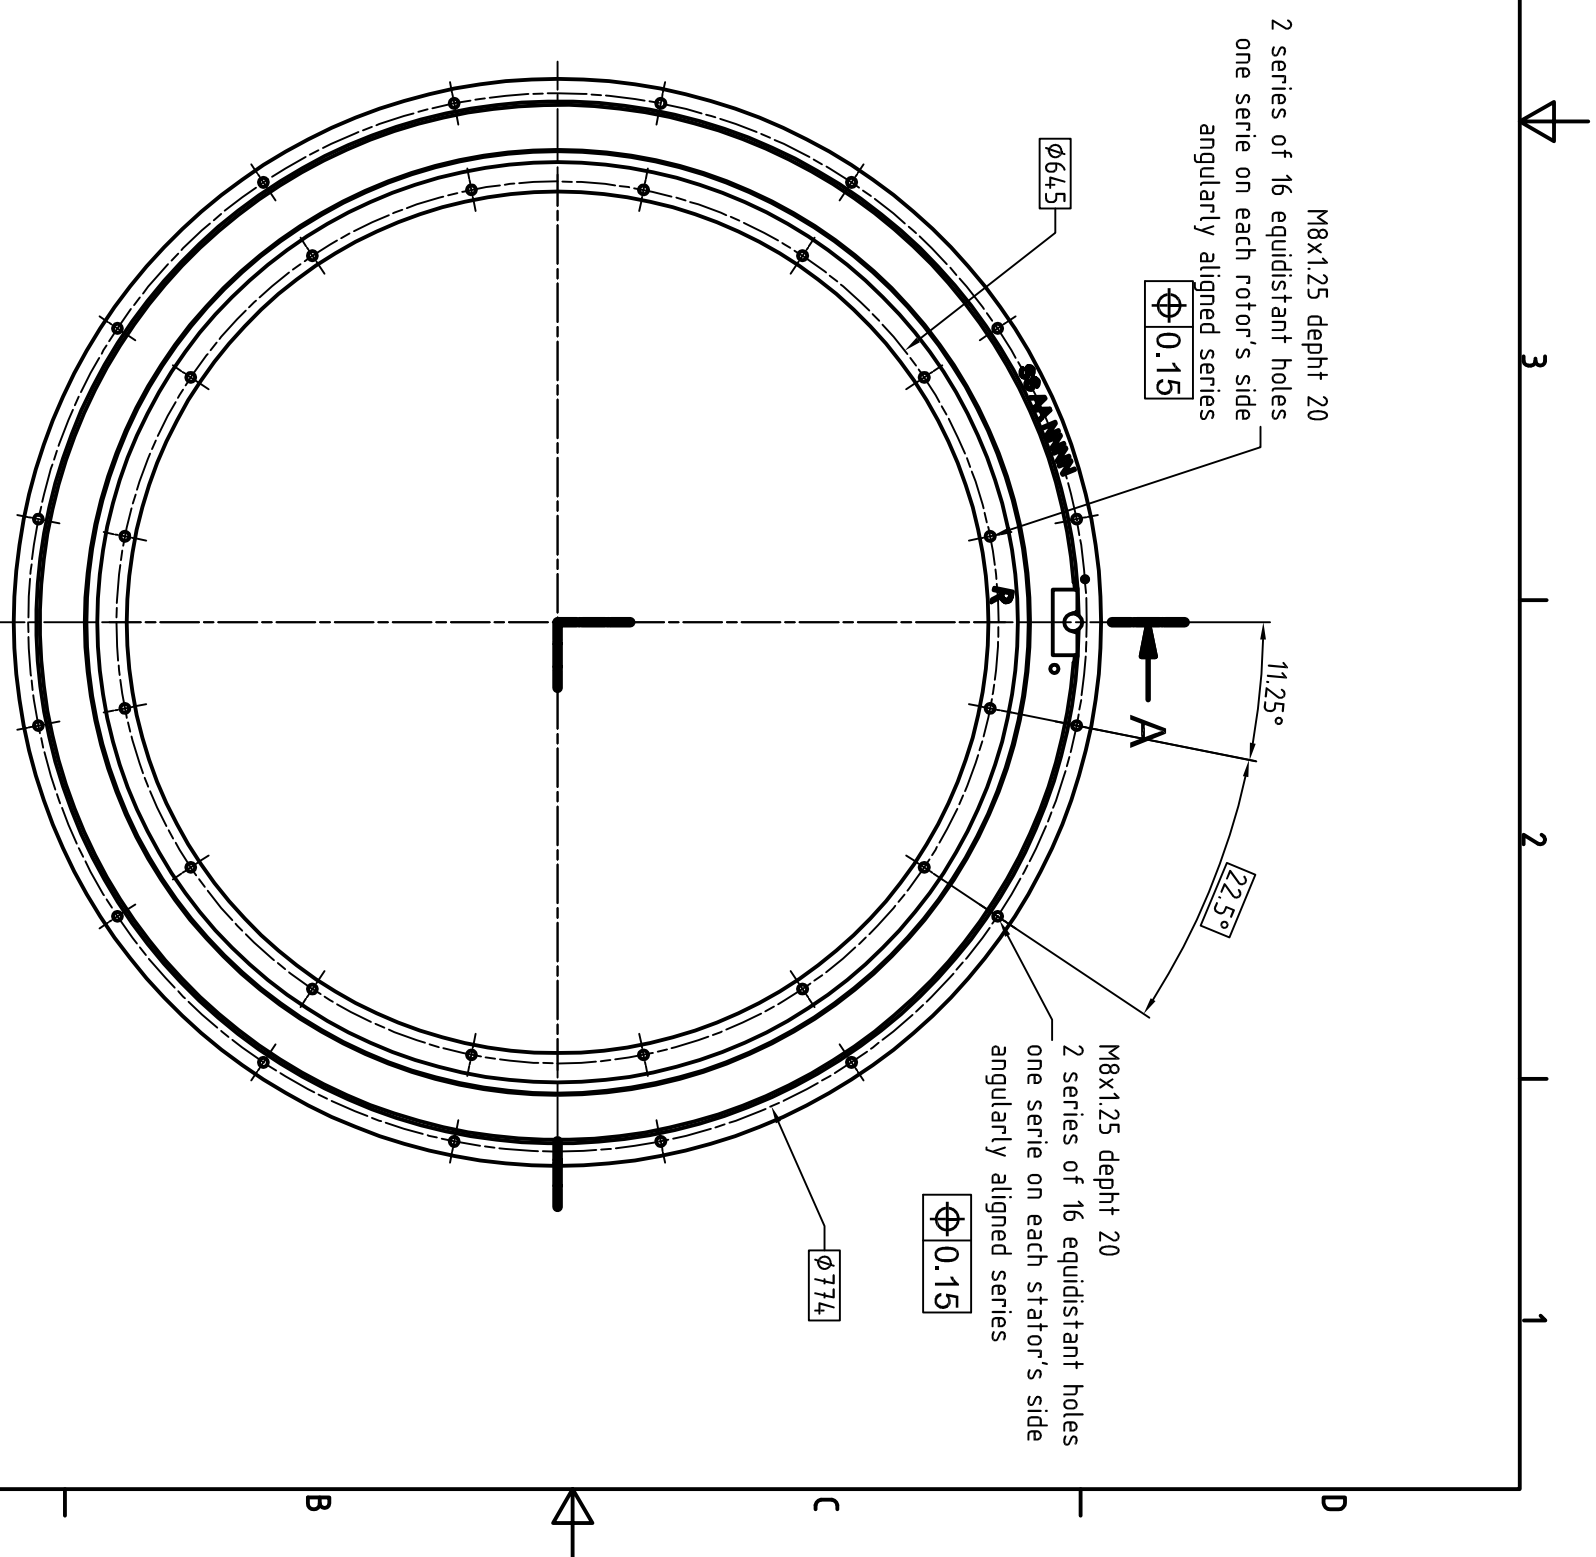


Cable output length 2m:  
 Power :  
 One shielded class 6 cable coded 1,2,3 green/yellow  
 Thermal sensors :  
 One shielded class 6 cable (2x2x0,25mm<sup>2</sup>)  
 Brown-White : PTC  
 Green-Yellow : KTY84  
 Minimum bending radius (except for the first 50mm) :  
 See table

Cable	Ø	R min.
2x2x0,25	7	84
4x1,5	10,2	120
4x2,5	11,4	135
4x4	13,1	155
4x6	15,9	190
4x10	18,8	225

ZONE FREE OF ANY PART  
 (cable passing)  
 NO STRESS, NO BENDING, IN THIS AREA

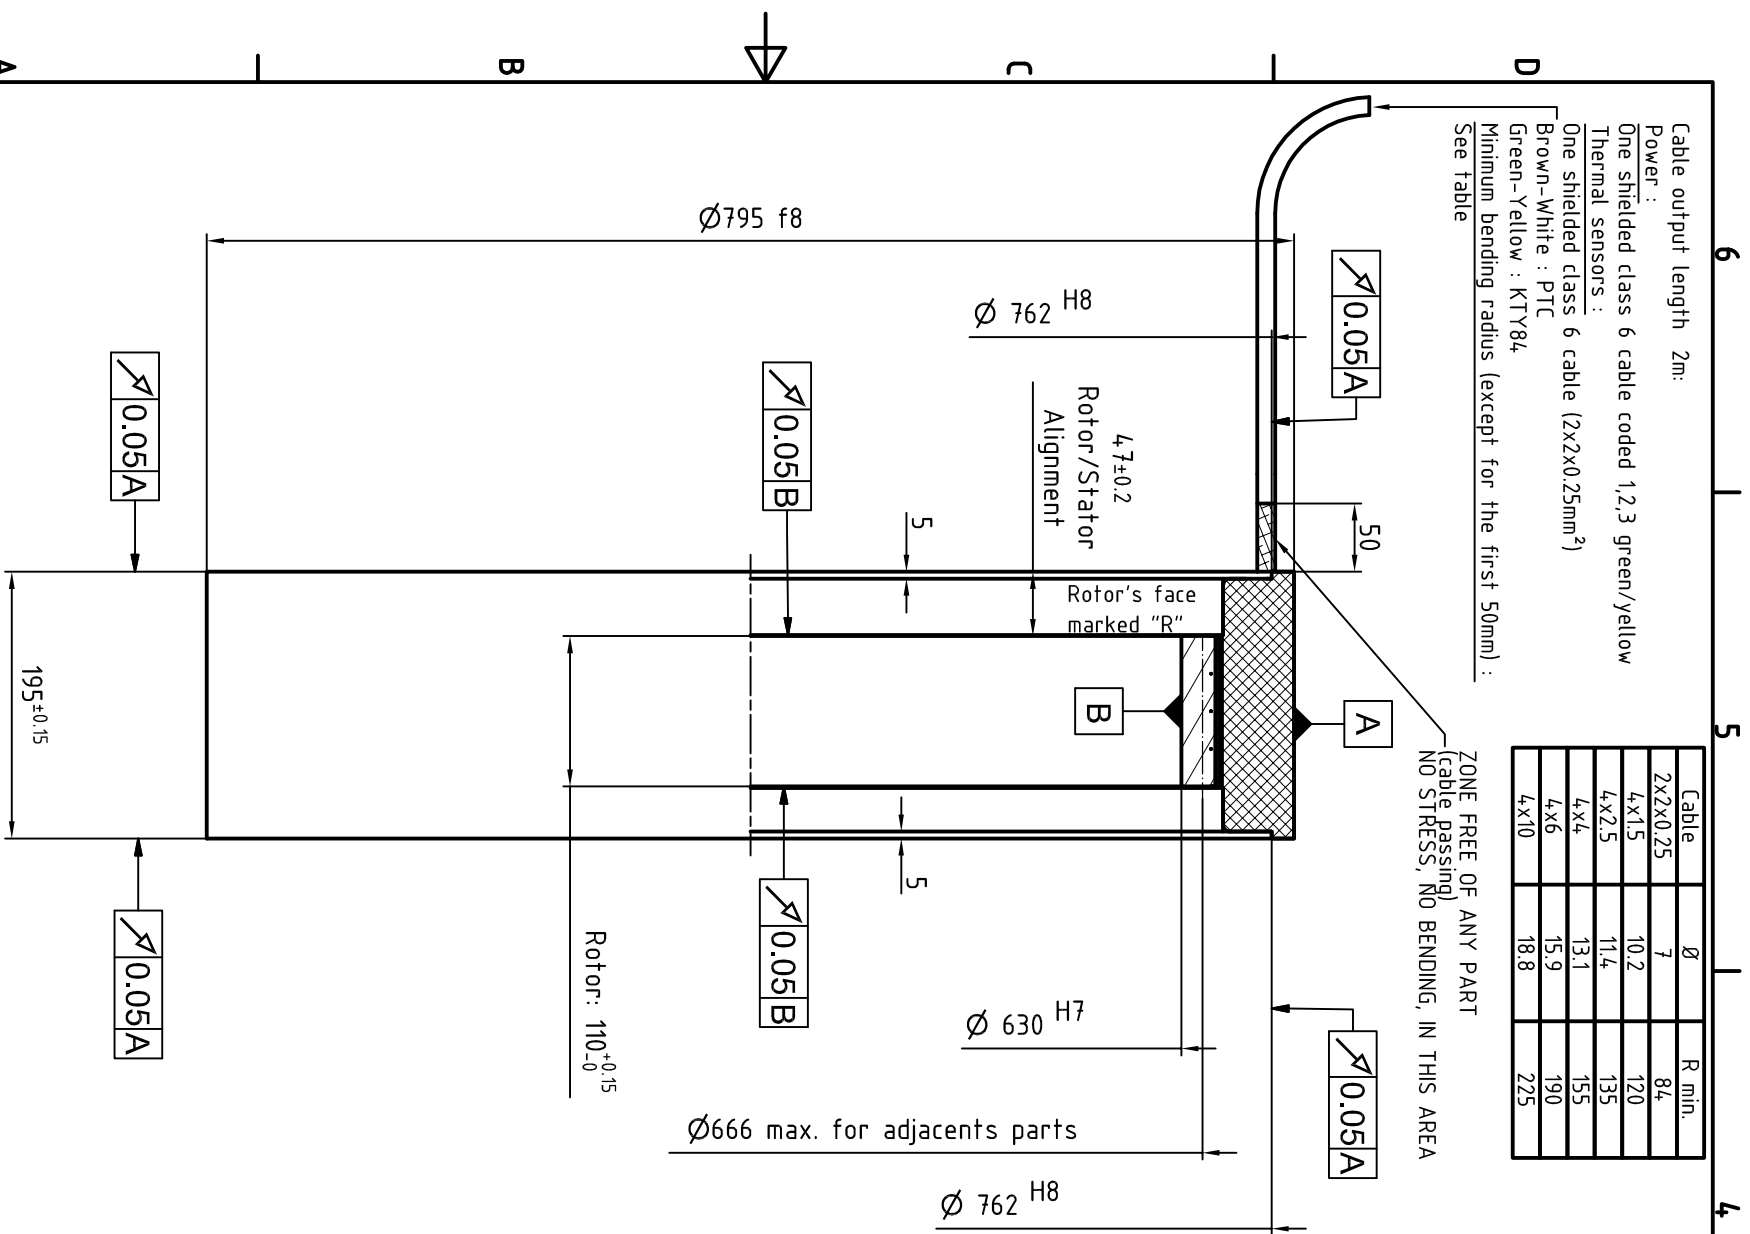

Nota:  
 - This drawing is valid only for motors with nominal current lower than 72 Amps.  
 - If the nominal current is greater than 72 Amps, please contact us.  
 - Rotor is not fitted in the stator.  
 For more information about mounting see document 800STK0-WA002

**ALXION**  
 AUTOMATIQUE & PRODUCTIQUE  
 Parc Technologique "Les Fossés Jean"  
 92712 COLOMBES Cedex  
 Tél: 0141306304 - Fax: 0141306136  
**800STK4M1XXXXXX**